T0022T"E0C/2001

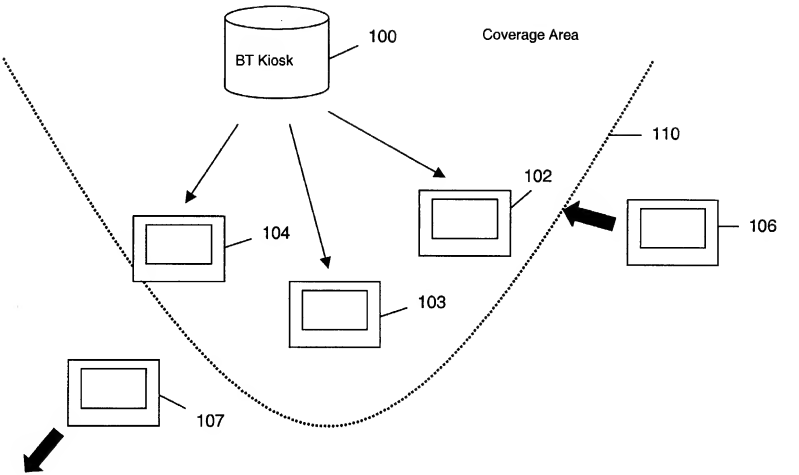

Figure 1

1002730.1.12800.1

Byte 0	Bytes 1, 2	Bytes 3 to n
Opcode for 'PUT'	Packet length	Sequences of headers

Figure 2

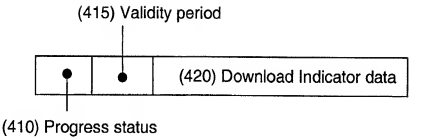

Figure 4

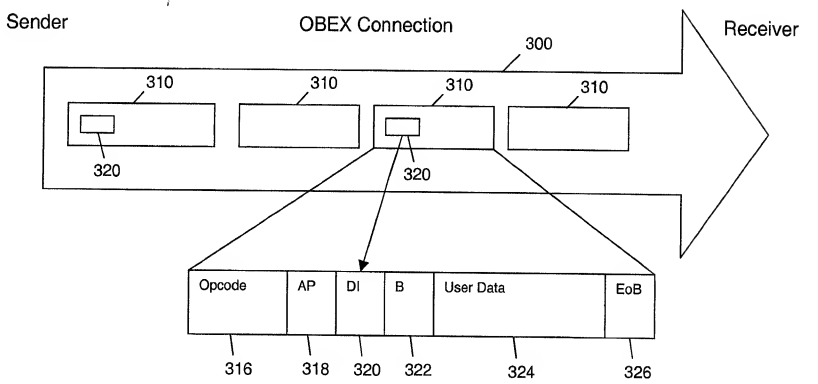
Sender
OBEX Connection
Receiver
300
310
310
310
310
320
320
Opcode
AP
DI
B
User Data
EoB
316
318
320
322
324
326

Figure 3

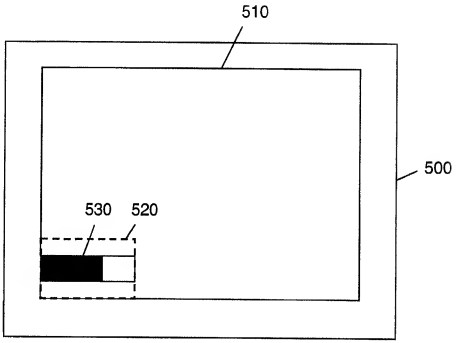

Figure 5